

## DATASHEET

# NI 9218

2 AI, 51.2 kS/s/ch Simultaneous, Universal Measurements



- DSUB or LEMO connectivity
- Built-in support for accelerometer, powered-sensor, full-bridge, and voltage measurements
- Support for half-bridge, quarter-bridge, 60 V, and current measurements with adapters
- 60 VDC, CAT I, channel-to-channel isolation

The NI 9218 is a 2-channel, universal C Series module designed for universal measurements in NI CompactDAQ and CompactRIO systems. The measurement type is selectable per channel, allowing you to perform different measurement types on each channel. The NI 9218 is ideal for creating universal test systems for automotive, off-highway, and data-logging systems.

### NI 9218 Kit Contents

#### NI 9218 with DSUB



#### NI 9218 with LEMO



- NI 9218 with DSUB
- NI 9218 Getting Started Guide
- 2-Position Micro-Fit Plug and Crimp Terminal Kit
- NI 9218 with LEMO
- NI 9218 Getting Started Guide
- Power Connector

NI 9218 Accessories

|                              | NI 9218 with DSUB                                                                 | NI 9218 with LEMO                                                                 |
|------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                              |  |  |
| Screw-Terminal Adapter       | NI 9982D (Cabled)<br>NI 9982F (Front-Mounted)                                     | NI 9982L (Cabled)                                                                 |
| ±20 mA Adapter               | NI 9983D (Cabled)<br>NI 9983F (Front-Mounted)                                     | NI 9983L (Cabled)                                                                 |
| ±60 V Adapter                | NI 9987D (Cabled)<br>NI 9987F (Front-Mounted)                                     | NI 9987L (Cabled)                                                                 |
| Half-Bridge Adapter          | NI 9986D (Cabled)<br>NI 9986F (Front-Mounted)                                     | NI 9986L (Cabled)                                                                 |
| 120 Ω Quarter-Bridge Adapter | NI 9984D (Cabled)<br>NI 9984F (Front-Mounted)                                     | NI 9984L (Cabled)                                                                 |
| 350 Ω Quarter-Bridge Adapter | NI 9985D (Cabled)<br>NI 9985F (Front-Mounted)                                     | NI 9985L (Cabled)                                                                 |
| Custom Cables                | NI 9988D Solder Cup                                                               | LEMO Plug                                                                         |
| Pigtail I/O Cables           | DSUB-to-Pigtail (1 m, 2 m)                                                        | LEMO-to-Pigtail (1 m, 2 m)                                                        |
| Power Connectors             | 2-Pos Micro Fit-to-Pigtail (1m)                                                   | —                                                                                 |

NI C Series Overview



NI provides more than 100 C Series modules for measurement, control, and communication applications. C Series modules can connect to any sensor or bus and allow for high-accuracy measurements that meet the demands of advanced data acquisition and control applications.

- Measurement-specific signal conditioning that connects to an array of sensors and signals
- Isolation options such as bank-to-bank, channel-to-channel, and channel-to-earth ground
- -40 °C to 70 °C temperature range to meet a variety of application and environmental needs
- Hot-swappable

The majority of C Series modules are supported in both CompactRIO and CompactDAQ platforms and you can move modules from one platform to the other with no modification.

## CompactRIO



CompactRIO combines an open-embedded architecture with small size, extreme ruggedness, and C Series modules in a platform powered by the NI LabVIEW reconfigurable I/O (RIO) architecture. Each system contains an FPGA for custom timing, triggering, and processing with a wide array of available modular I/O to meet any embedded application requirement.

## CompactDAQ

CompactDAQ is a portable, rugged data acquisition platform that integrates connectivity, data acquisition, and signal conditioning into modular I/O for directly interfacing to any sensor or signal. Using CompactDAQ with LabVIEW, you can easily customize how you acquire, analyze, visualize, and manage your measurement data.




## Software

### LabVIEW Professional Development System for Windows




- Use advanced software tools for large project development
- Generate code automatically using DAQ Assistant and Instrument I/O Assistant
- Use advanced measurement analysis and digital signal processing
- Take advantage of open connectivity with DLLs, ActiveX, and .NET objects
- Build DLLs, executables, and MSI installers

## NI LabVIEW FPGA Module




- Design FPGA applications for NI RIO hardware
- Program with the same graphical environment used for desktop and real-time applications
- Execute control algorithms with loop rates up to 300 MHz
- Implement custom timing and triggering logic, digital protocols, and DSP algorithms
- Incorporate existing HDL code and third-party IP including Xilinx IP generator functions
- Purchase as part of the LabVIEW Embedded Control and Monitoring Suite

## NI LabVIEW Real-Time Module




- Design deterministic real-time applications with LabVIEW graphical programming
- Download to dedicated NI or third-party hardware for reliable execution and a wide selection of I/O
- Take advantage of built-in PID control, signal processing, and analysis functions
- Automatically take advantage of multicore CPUs or set processor affinity manually
- Take advantage of real-time OS, development and debugging support, and board support
- Purchase individually or as part of a LabVIEW suite

# NI 9218 Circuitry

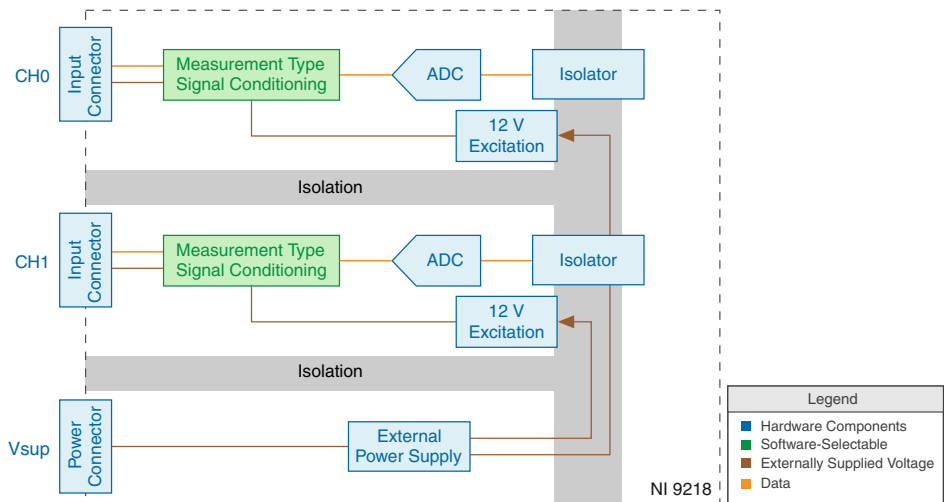


- Two 24-bit analog-to-digital converters (ADCs) simultaneously sample both AI channels.
- The NI 9218 provides channel-to-channel isolation.
- The NI 9218 reconfigures the signal conditioning for each measurement type.
- The NI 9218 provides excitation for IEPE and bridge completion measurement types.
- The NI 9218 can provide optional 12 V sensor excitation for  $\pm 16$  V,  $\pm 65$  mV, and  $\pm 20$  mA measurement types.

## $\pm 16$ V and $\pm 65$ mV Signal Conditioning

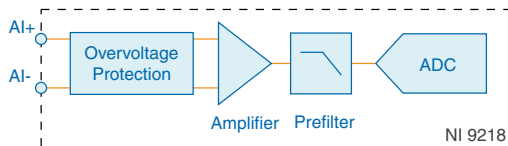


Input signals on each channel are buffered, conditioned, and then sampled by an ADC.

# Full-Bridge Signal Conditioning

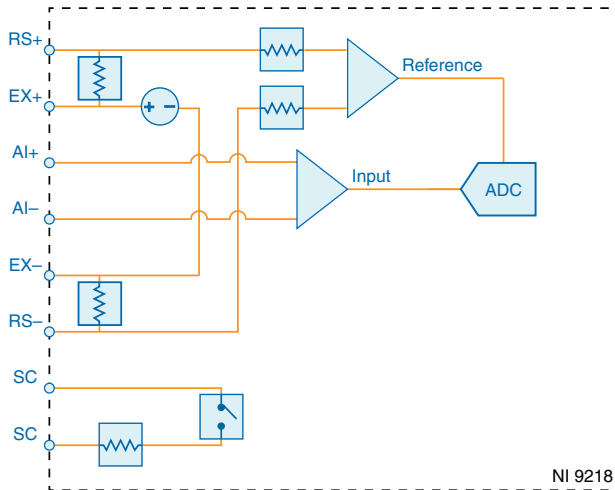


- The analog input connections sense then amplify the incoming analog signal.
- The excitation connections provide differential bridge-excitation voltage.
- Remote sensing continuously and automatically corrects for lead-wire induced excitation voltage loss when using the RS connections.
- Shunt calibration can be used to correct for lead-wire induced desensitization of the bridge.

# IEPE Signal Conditioning

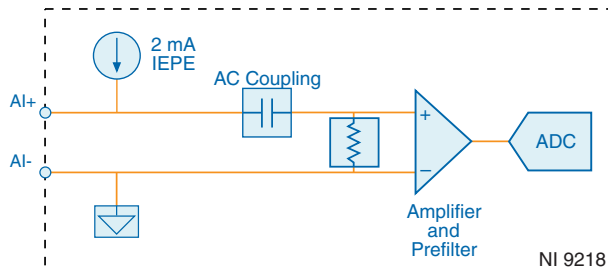


- The incoming analog signal is referenced to an isolated ground.
- Each channel is configured for AC coupling with an IEPE current.
- Each channel provides a TEDS Class 1 interface.

## ±20 mA Signal Conditioning

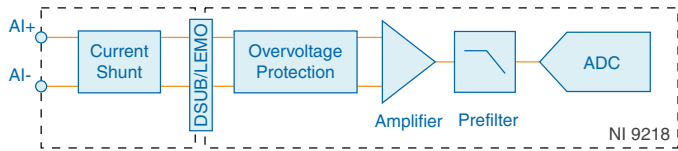


The NI 9983 provides a current shunt for the incoming analog signal.

## ±60 V Signal Conditioning

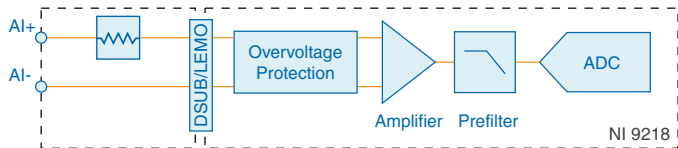


The NI 9987 provides an attenuator for the incoming analog signal.

## Half-Bridge Signal Conditioning

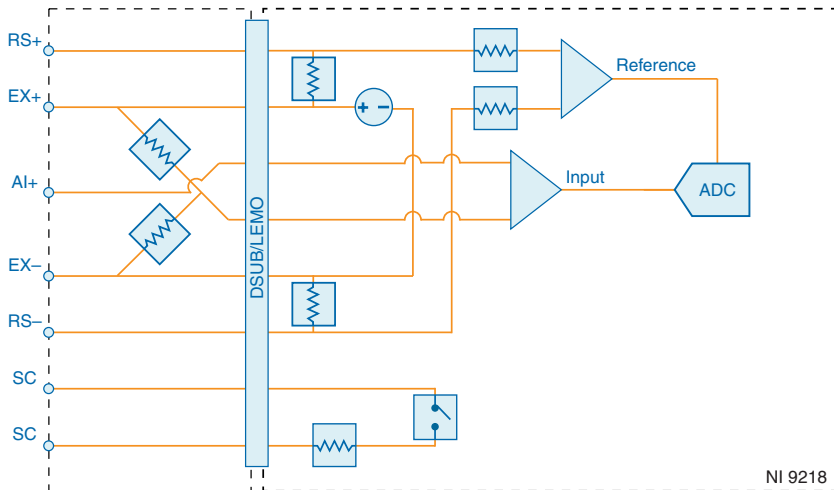

- The NI 9886 provides half bridge completion resistors for the incoming analog signal.
- You must connect AI+, EX+, and EX-.
- RS+ and RS- connections are optional.
- You do not need to connect the AI- signal because it is connected internally.

# Quarter-Bridge Mode Conditioning

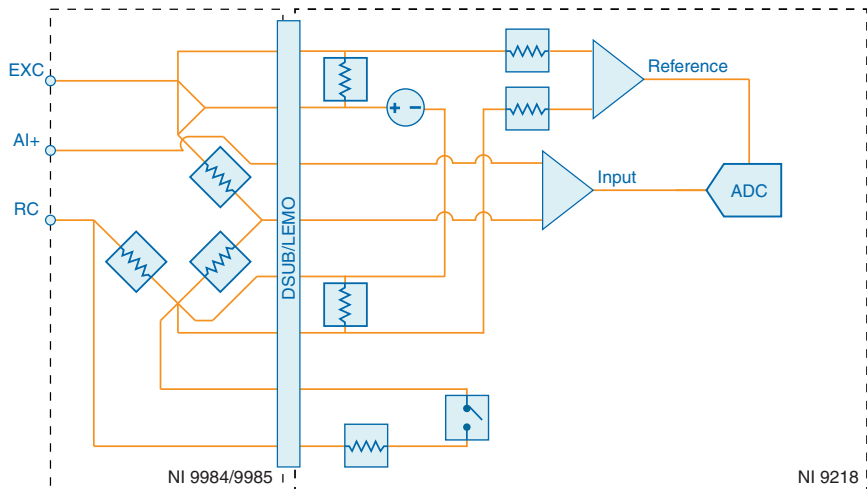

The NI 9984 and NI 9985 provide a quarter-bridge completion resistor and half-bridge completion resistors.

## Filtering

The NI 9218 uses a combination of analog and digital filtering to provide an accurate representation of in-band signals while rejecting out-of-band signals. The filters discriminate between signals based on the frequency range, or bandwidth, of the signal. The three important bandwidths to consider are the passband, the stopband, and the alias-free bandwidth.

The NI 9218 represents signals within the passband, as quantified primarily by passband ripple and phase nonlinearity. All signals that appear in the alias-free bandwidth are either unaliased signals or signals that have been filtered by at least the amount of the stopband rejection.

### Passband

The signals within the passband have frequency-dependent gain or attenuation. The small amount of variation in gain with respect to frequency is called the passband flatness. The digital filters of the NI 9218 adjust the frequency range of the passband to match the data rate. Therefore, the amount of gain or attenuation at a given frequency depends on the data rate.

### Stopband

The filter significantly attenuates all signals above the stopband frequency. The primary goal of the filter is to prevent aliasing. Therefore, the stopband frequency scales precisely with the data rate. The stopband rejection is the minimum amount of attenuation applied by the filter to all signals with frequencies within the stopband.

# Alias-Free Bandwidth

Any signal that appears in the alias-free bandwidth of the NI 9218 is not an aliased artifact of signals at a higher frequency. The alias-free bandwidth is defined by the ability of the filter to reject frequencies above the stopband frequency, and it is equal to the data rate minus the stopband frequency.

## NI 9218 Specifications

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.



**Caution** Do not operate the NI 9218 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to NI for repair.

## General Characteristics

|                                    |                                           |
|------------------------------------|-------------------------------------------|
| Number of channels                 | 2 analog input channels                   |
| ADC resolution                     | 24 bits                                   |
| Type of ADC                        | Delta-Sigma                               |
| Sampling mode                      | Simultaneous                              |
| TEDS support                       |                                           |
| NI 9218 with DSUB                  | IEEE 1451.4 TEDS Class 1                  |
| NI 9218 with LEMO                  | IEEE 1451.4 TEDS Class 1 and TEDS Class 2 |
| Internal master timebase ( $f_M$ ) |                                           |
| Frequency                          | 13.1072 MHz                               |
| Accuracy                           | 100 ppm                                   |

Figure 1. Data Rates

$$\frac{f_M \div 256}{n}, n = 1, 2, \dots, 31$$

|                                                          |             |
|----------------------------------------------------------|-------------|
| Data rate range ( $f_s$ ) using internal master timebase |             |
| Minimum                                                  | 1.652 kS/s  |
| Maximum                                                  | 51.2 kS/s   |
| Data rate range ( $f_s$ ) using external master timebase |             |
| Minimum                                                  | 1 kS/s      |
| Maximum                                                  | 51.367 kS/s |

## Overvoltage protection

|                      |               |
|----------------------|---------------|
| Pin 2 to Pin 3       | -20 V to 30 V |
| Any other pin-to-pin | ±30 V         |



**Note** Be aware when processing acquisitions that include full-scale data. Full-scale data readings indicate that an over-range has occurred in the analog front-end.

## ±16 V Characteristics

|                   |         |
|-------------------|---------|
| Input coupling    | DC      |
| Measurement range |         |
| Typical           | ±16.3 V |
| Minimum           | ±16.0 V |

**Table 1. ±16 V Accuracy**

| Measurement Conditions    |                          | Gain Error | Offset Error |
|---------------------------|--------------------------|------------|--------------|
| Calibrated                | Typical, 23 °C ±5 °C     | 0.08%      | 0.70 mV      |
|                           | Maximum, -40 °C to 70 °C | 0.20%      | 9 mV         |
| Uncalibrated <sup>1</sup> | Typical, 23 °C ±5 °C     | 1.2%       | 50 mV        |
|                           | Maximum, -40 °C to 70 °C | 2.0%       | 70 mV        |

|                                        |            |
|----------------------------------------|------------|
| Gain drift                             | 15 ppm/°C  |
| Offset drift                           | 32 µV/°C   |
| Integral non-linearity (INL)           | 150 µV     |
| Input noise, RMS                       |            |
| 51.2 kS/s                              | 128 µV     |
| 25.6 kS/s                              | 107 µV     |
| 4.27 kS/s                              | 81 µV      |
| Input impedance                        | 390 kΩ     |
| Input bandwidth, -3 dB                 | 0.49 $f_s$ |
| Flatness, DC-20 kHz, referred to 1 kHz |            |
| Typical                                | ±30 mdB    |
| Maximum                                | ±50 mdB    |

<sup>1</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

|                                                               |                                        |
|---------------------------------------------------------------|----------------------------------------|
| Phase non-linearity, DC-20 kHz                                | 0.30°                                  |
| Input delay                                                   | $(40 + [5/512])/f_s + 5.3 \mu\text{s}$ |
| Stopband                                                      |                                        |
| Frequency                                                     | $0.55 f_s$                             |
| Rejection                                                     | 100 dB                                 |
| Alias-free bandwidth                                          | $0.45 f_s$                             |
| Oversample rate                                               | $64 f_s$                               |
| Rejection at oversample rate<br>( $f_s = 51.2 \text{ kS/s}$ ) | 100 dB                                 |
| Total Harmonic Distortion (THD),<br>1 kHz, -1 dBFS            | -100 dBc                               |
| Spurious-Free Dynamic Range (SFDR),<br>1 kHz, 1 Vrms          | 101 dB                                 |
| Crosstalk                                                     |                                        |
| 60 Hz, 1 Vrms, common mode                                    | -120 dBFS                              |
| 1 kHz normal mode, full-scale<br>aggressor                    | -109 dBFS                              |
| CMRR, 60 Hz 1 Vrms-to-earth ground                            | -120 dBFS                              |
| Powered sensor 12 V excitation                                |                                        |
| Voltage level                                                 | 12 V $\pm 5\%$                         |
| Voltage noise, RMS<br>100 kHz bandwidth                       | 1 mV                                   |
| Output current                                                |                                        |
| Typical                                                       | 50.5 mA                                |
| Minimum                                                       | 46.5 mA                                |
| Settling Time (to 1 % of final value<br>after enabling)       | 200 ms                                 |

## Related Information

[Vsup Power Requirements](#) on page 25

## ±65 mV Characteristics

|                |    |
|----------------|----|
| Input coupling | DC |
|----------------|----|

Measurement range

|         |         |
|---------|---------|
| Typical | 73.5 mV |
| Minimum | 72 mV   |

**Table 2.  $\pm 65$  mV Accuracy**

| Measurement Conditions    |                           | Gain Error | Offset Error |
|---------------------------|---------------------------|------------|--------------|
| Calibrated                | Typical, 23 °C $\pm 5$ °C | 0.13%      | 8 $\mu$ V    |
|                           | Maximum, -40 °C to 70 °C  | 0.20%      | 130 $\mu$ V  |
| Uncalibrated <sup>2</sup> | Typical, 23 °C $\pm 5$ °C | 1.2%       | 300 $\mu$ V  |
|                           | Maximum, -40 °C to 70 °C  | 2.0%       | 450 $\mu$ V  |

Gain drift 10 ppm/°C

Offset drift 320 nV/°C

Input noise, RMS

|           |             |
|-----------|-------------|
| 51.2 kS/s | 4.3 $\mu$ V |
| 25.6 kS/s | 3 $\mu$ V   |
| 4.27 kS/s | 1.3 $\mu$ V |

Input impedance >10 M $\Omega$

Input bandwidth, -3 dB 0.49  $f_s$

Flatness, DC-20 kHz, referred to 1 kHz

|         |                    |
|---------|--------------------|
| Typical | -40 mdB to 0 mdB   |
| Maximum | -150 mdB to 20 mdB |

Phase non-linearity, DC-20 kHz 0.2°

Input delay  $(40 + [5/512])/f_s + 3.9 \mu$ s

Stopband

|           |            |
|-----------|------------|
| Frequency | 0.55 $f_s$ |
| Rejection | 100 dB     |

Alias-free bandwidth 0.45  $f_s$

Oversample rate 64  $f_s$

Rejection at oversample rate 100 dB

( $f_s = 51.2$  kS/s)

<sup>2</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

|                                                        |               |
|--------------------------------------------------------|---------------|
| Total Harmonic Distortion (THD),<br>1 kHz, -1 dBFS     | -95 dBc       |
| Spurious-Free Dynamic Range (SFDR),<br>1 kHz, -1 dBFS  | 95 dB         |
| Crosstalk                                              |               |
| 60 Hz, 1 Vrms, common mode                             | -120 dBFS     |
| 1 kHz normal mode, full-scale<br>aggressor             | -109 dBFS     |
| CMRR, 60 Hz, 1 Vrms-to-earth ground                    | -133 dBFS     |
| Powered sensor 12 V excitation                         |               |
| Voltage level                                          | 12 V $\pm$ 5% |
| Voltage noise, RMS 100 kHz<br>bandwidth                | 1 mV          |
| Output current                                         |               |
| Typical                                                | 50.5 mA       |
| Minimum                                                | 46.5 mA       |
| Settling Time (to 1% of final value<br>after enabling) | 200 ms        |

**Related Information**

*Vsup* [Power Requirements](#) on page 25

Full-Bridge Characteristics

|                   |           |
|-------------------|-----------|
| Input coupling    | DC        |
| Measurement range |           |
| Typical           | 22.1 mV/V |
| Minimum           | 21.7 mV/V |

**Table 3. Full-Bridge Accuracy**

| Measurement Conditions    |                  |                         | Gain  | Offset              |                                   |
|---------------------------|------------------|-------------------------|-------|---------------------|-----------------------------------|
|                           |                  |                         |       | Without Offset Null | ≤ 90 days, ±5 °C from Offset Null |
| Calibrated                | 3.3 V Excitation | Typical, 23 °C ±5 °C    | 0.10% | 2.4 µV/V            | 0.5 µV/V                          |
|                           |                  | Maximum -40 °C to 70 °C | 0.20% | 40 µV/V             | 5 µV/V                            |
|                           | 2 V Excitation   | Typical, 23 °C ±5 °C    | 0.10% | 30 µV /V            | 0.8 µV/V                          |
|                           |                  | Maximum -40 °C to 70 °C | 0.20% | 87 µV/V             | 8 µV/V                            |
| Uncalibrated <sup>3</sup> | 3.3 V Excitation | Typical, 23 °C ±5 °C    | 1.2%  | 100 µV/V            | —                                 |
|                           |                  | Maximum -40 °C to 70 °C | 2.0%  | 150 µV/V            | —                                 |
|                           | 2 V Excitation   | Typical, 23 °C ±5 °C    | 1.2%  | 120 µV/V            | —                                 |
|                           |                  | Maximum -40 °C to 70 °C | 2.0%  | 200 µV/V            | —                                 |

|            |           |
|------------|-----------|
| Gain drift | 10 ppm/°C |
|------------|-----------|

|              |  |
|--------------|--|
| Offset drift |  |
|--------------|--|

|                  |             |
|------------------|-------------|
| 3.3 V excitation | 100 nV/V/°C |
|------------------|-------------|

|                |             |
|----------------|-------------|
| 2 V excitation | 160 nV/V/°C |
|----------------|-------------|

<sup>3</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

**Table 4.** Input Noise, RMS

| Excitation Voltage | Sample Rate         |                     |                     |
|--------------------|---------------------|---------------------|---------------------|
|                    | 4.27 kS/s           | 25.6 kS/s           | 51.2 kS/s           |
| 3.3 V              | 0.4 $\mu\text{V/V}$ | 1.0 $\mu\text{V/V}$ | 1.3 $\mu\text{V/V}$ |
| 2 V                | 0.7 $\mu\text{V/V}$ | 1.6 $\mu\text{V/V}$ | 2.1 $\mu\text{V/V}$ |

Differential input impedance >10 M $\Omega$

Input bandwidth, -3 dB  $0.49 f_s$

Flatness, DC-20 kHz, referred to 1 kHz

Typical -40 mdB to 0 mdB

Maximum -150 mdB to 20 mdB

Phase non-linearity, DC-20 kHz  $0.2^\circ$

Input delay  $(40 + [5/512])/f_s + 3.9 \mu\text{s}$

Stopband

Frequency  $0.55 f_s$

Rejection 100 dB

Alias-free bandwidth  $0.45 f_s$

Oversample rate  $64 f_s$

Rejection at oversample rate 100 dB  
( $f_s = 51.2 \text{ kS/s}$ )

Total Harmonic Distortion (THD), 1 kHz, -1 dBFS -95 dBc

Spurious-Free Dynamic Range (SFDR), 1 kHz, -1 dBFS 95 dB

Crosstalk

60 Hz, 1 Vrms, common mode -120 dBFS

1 kHz, normal mode, full-scale aggressor -109 dBFS

CMRR, 60 Hz, 1 Vrms-to-earth ground -133 dBFS

Shunt calibration accuracy  $50 \text{ k}\Omega \pm 0.2\%$

Strain excitation voltage

2 V level  $2 \text{ V} \pm 3\%$

3.3 V level  $3.3 \text{ V} \pm 3\%$

## Output current

|             |         |
|-------------|---------|
| 2 V level   | 17.8 mA |
| 3.3 V level | 10.1 mA |

## IEPE Characteristics

|                   |        |
|-------------------|--------|
| Input coupling    | AC     |
| Measurement range |        |
| Typical           | 5.33 V |
| Minimum           | 5.0 V  |

**Table 5. IEPE Accuracy**

| Measurement Conditions    |                          | Gain Error       |
|---------------------------|--------------------------|------------------|
| Calibrated                | Typical, 23 °C ±5 °C     | 0.20% (0.017 dB) |
|                           | Maximum, -40 °C to 70 °C | 0.40% (0.034 dB) |
| Uncalibrated <sup>4</sup> | Typical, 23 °C ±5 °C     | 1.7% (0.146 dB)  |
|                           | Maximum, -40 °C to 70 °C | 2.0% (0.172 dB)  |

|                                           |                                        |
|-------------------------------------------|----------------------------------------|
| Residual DC offset                        | <150 mV                                |
| Gain drift                                | 25 ppm/°C                              |
| Input noise, RMS                          |                                        |
| 51.2 kS/s                                 | 50 µV                                  |
| 25.6 kS/s                                 | 38 µV                                  |
| 4.27 kS/s                                 | 25 µV                                  |
| Input impedance                           | 300 kΩ                                 |
| Input bandwidth, -3 dB                    | $0.49 f_s$                             |
| Flatness, 10 Hz-20 kHz, referred to 1 kHz |                                        |
| Typical                                   | ±25 mdB                                |
| Maximum                                   | ±40 mdB                                |
| Phase non-linearity, 100 Hz-20 kHz        | 0.25°                                  |
| AC cutoff frequency, -3 dB                | 0.5 Hz                                 |
| Input delay                               | $(40 + [5/512])/f_s + 3.9 \mu\text{s}$ |

<sup>4</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

Stopband

|                                                           |            |
|-----------------------------------------------------------|------------|
| Frequency                                                 | $0.55 f_s$ |
| Rejection                                                 | 100 dB     |
| Alias-free bandwidth                                      | $0.45 f_s$ |
| Oversample rate                                           | $64 f_s$   |
| Rejection at oversample rate<br>( $f_s = 51.2$ kS/s)      | 100 dB     |
| Total Harmonic Distortion (THD),<br>1 kHz, -1 dBFS        | -102 dBc   |
| Spurious-Free Dynamic Range (SFDR),<br>1 kHz, 1 Vrms      | 107 dB     |
| Intermodulation Distortion (IMD),<br>(CCIF 11 kHz/12 kHz) | -97 dB     |

Crosstalk

|                                            |           |
|--------------------------------------------|-----------|
| 60 Hz, 1 Vrms, common mode                 | -120 dBFS |
| 1 kHz normal mode, full-scale<br>aggressor | -109 dBFS |
| CMRR, 60 Hz, 1 Vrms-to-earth ground        | -122 dBFS |

IEPE excitation current

|         |        |
|---------|--------|
| Typical | 2.2 mA |
| Minimum | 2.1 mA |

Compliance voltage

|         |        |
|---------|--------|
| Typical | 20.5 V |
| Minimum | 19.5 V |

If you are using an IEPE sensor, use the following equation to ensure that your configuration meets the IEPE compliance voltage range. This equation must resolve to 0 to 19.5.

**Figure 2. IEPE Compliance Voltage Equation**

$$V_{\text{bias}} \pm V_{\text{full-scale}}$$

where

$V_{\text{bias}}$  is the bias voltage of the IEPE sensor

$V_{\text{full-scale}}$  is the full-scale voltage of the IEPE sensor

## ±20 mA Characteristics

The ±20 mA measurement type requires the NI 9983 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9983.

|                   |         |
|-------------------|---------|
| Input coupling    | DC      |
| Measurement range |         |
| Typical           | 24.4 mA |
| Minimum           | 23.0 mA |

**Table 6.** ±20 mA Accuracy

| Measurement Conditions    |                          | Gain Error | Offset Error |
|---------------------------|--------------------------|------------|--------------|
| Calibrated                | Typical, 23 °C ±5 °C     | 0.40%      | 5 µA         |
|                           | Maximum, -40 °C to 70 °C | 0.60%      | 42 µA        |
| Uncalibrated <sup>5</sup> | Typical, 23 °C ±5 °C     | 1.5%       | 100 µA       |
|                           | Maximum, -40 °C to 70 °C | 2.0%       | 150 µA       |

|                        |                                  |
|------------------------|----------------------------------|
| Gain drift             | 35 ppm/°C                        |
| Offset drift           | 105 nA/°C                        |
| Shunt resistance       | 3.01 Ω                           |
| Input noise, RMS       |                                  |
| 51.2 kS/s              | 1.4 µA                           |
| 25.6 kS/s              | 1.0 µA                           |
| 4.27 kS/s              | 0.5 µA                           |
| Input impedance        | 45 Ω ±30%                        |
| Input bandwidth, -3 dB | 0.49 $f_s$                       |
| Input delay            | $(40 + [5/512])/f_s + 3.9 \mu s$ |
| Stopband               |                                  |
| Frequency              | 0.55 $f_s$                       |
| Rejection              | 100 dB                           |
| Alias-free bandwidth   | 0.45 $f_s$                       |
| Oversample rate        | 64 $f_s$                         |

<sup>5</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

|                                                        |                |
|--------------------------------------------------------|----------------|
| Rejection at oversample rate<br>( $f_s = 51.2$ kS/s)   | 100 dB         |
| Crosstalk                                              |                |
| 60 Hz, 1 Vrms, common mode                             | -120 dBFS      |
| 1 kHz normal mode, full-scale aggressor                | -109 dBFS      |
| CMRR, 60 Hz, 1 Vrms-to-earth ground                    | -99 dBFS       |
| Powered sensor 12 V excitation                         |                |
| Voltage level                                          | 12 V $\pm 5\%$ |
| Voltage noise, RMS,<br>100 kHz bandwidth               | 1 mV           |
| Output current                                         |                |
| Typical                                                | 50.5 mA        |
| Minimum                                                | 46.5 mA        |
| Settling Time (to 1% of final value<br>after enabling) | 200 ms         |

Related Information

[Vsup Power Requirements](#) on page 25

±60 V Characteristics

The ±60 V measurement type requires the NI 9987 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9987.

|                   |              |
|-------------------|--------------|
| Input coupling    | DC           |
| Measurement range |              |
| Typical           | $\pm 62.1$ V |
| Minimum           | $\pm 60$ V   |

Table 7. ±60 V Accuracy

| Measurement Conditions |                           | Gain Error | Offset Error |
|------------------------|---------------------------|------------|--------------|
| Calibrated             | Typical, 23 °C $\pm 5$ °C | 0.3%       | 3 mV         |
|                        | Maximum, -40 °C to 70 °C  | 0.6%       | 40 mV        |

**Table 7.  $\pm 60$  V Accuracy (Continued)**

| Measurement Conditions    |                           | Gain Error | Offset Error |
|---------------------------|---------------------------|------------|--------------|
| Uncalibrated <sup>6</sup> | Typical, 23 °C $\pm$ 5 °C | 1.3%       | 200 mV       |
|                           | Maximum, -40 °C to 70 °C  | 2.0%       | 300 mV       |

|                                                                  |                                         |
|------------------------------------------------------------------|-----------------------------------------|
| Gain drift                                                       | 30 ppm/°C                               |
| Offset drift                                                     | 120 $\mu$ V/°C                          |
| Integral non-linearity (INL)                                     | 15 mV                                   |
| Input noise, RMS                                                 |                                         |
| 51.2 kS/s                                                        | 500 $\mu$ V                             |
| 25.6 kS/s                                                        | 420 $\mu$ V                             |
| 4.27 kS/s                                                        | 320 $\mu$ V                             |
| Input impedance                                                  | 1.49 M $\Omega$                         |
| Input bandwidth, -3 dB                                           |                                         |
| NI 9987D/9987L                                                   | Lesser of 2.8 kHz or $0.49 f_s$         |
| NI 9987F                                                         | Lesser of 7 kHz or $0.49 f_s$           |
| Flatness, DC to 500 Hz, referred to DC,<br>$f_s \geq 1.652$ kS/s | 0.2 dB                                  |
| Input delay                                                      |                                         |
| NI 9987D                                                         | $(40 + [5/512])/f_s + 58.7 \mu\text{s}$ |
| NI 9987L                                                         | $(40 + [5/512])/f_s + 57.9 \mu\text{s}$ |
| NI 9987F                                                         | $(40 + [5/512])/f_s + 27.2 \mu\text{s}$ |
| Stopband                                                         |                                         |
| Frequency                                                        | $0.55 f_s$                              |
| Rejection                                                        | 100 dB                                  |
| Alias-free bandwidth                                             | $0.45 f_s$                              |
| Oversample rate                                                  | $64 f_s$                                |
| Rejection at oversample rate<br>( $f_s = 51.2$ kS/s)             | 100 dB                                  |

<sup>6</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

|                                                    |           |
|----------------------------------------------------|-----------|
| Total Harmonic Distortion (THD), 8 Vrms, 500 Hz    | -80 dBc   |
| Spurious-Free Dynamic Range (SFDR), 8 Vrms, 500 Hz | -80 dB    |
| Crosstalk                                          |           |
| 60 Hz, 1 Vrms, common mode                         | -120 dBFS |
| 1 kHz, normal mode, full-scale aggressor           | -70 dBFS  |
| CMRR, 60 Hz, 1 Vrms-to-earth ground                | -89 dBFS  |

## Half-Bridge Mode Characteristics

The half-bridge measurement type requires the NI 9986 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9986.

|                   |           |
|-------------------|-----------|
| Input coupling    | DC        |
| Measurement range |           |
| Typical           | 22.1 mV/V |
| Minimum           | 21.7 mV/V |

**Table 8.** Half-Bridge Accuracy

| Measurement Conditions |                          |                         | Gain  | Offset              |                                   |
|------------------------|--------------------------|-------------------------|-------|---------------------|-----------------------------------|
|                        |                          |                         |       | Without Offset Null | ≤ 90 days, ±5 °C from Offset Null |
| Calibrated             | 3.3 V and 2 V excitation | Typical 23 °C ±5 °C     | 0.10% | 700 μV/V            | 45 μV/V                           |
|                        |                          | Maximum -40 °C to 70 °C | 0.20% | 1000 μV/V           | 90 μV/V                           |

**Table 8. Half-Bridge Accuracy (Continued)**

| Measurement Conditions    |                          |                         | Gain | Offset              |                                   |
|---------------------------|--------------------------|-------------------------|------|---------------------|-----------------------------------|
|                           |                          |                         |      | Without Offset Null | ≤ 90 days, ±5 °C from Offset Null |
| Uncalibrated <sup>7</sup> | 3.3 V and 2 V excitation | Typical 23 °C ±5 °C     | 1.2% | 800 µV/V            | —                                 |
|                           |                          | Maximum -40 °C to 70 °C | 2.0% | 1.1 mV/V            | —                                 |

Gain drift 10 ppm/°C

Offset drift 1.3 µV/V/°C

**Table 9. Input Noise, RMS**

| Excitation Voltage | Sample Rate |           |           |
|--------------------|-------------|-----------|-----------|
|                    | 4.27 kS/s   | 25.6 kS/s | 51.2 kS/s |
| 3.3 V              | 0.4 µV/V    | 1.0 µV/V  | 1.3 µV/V  |
| 2 V                | 0.7 µV/V    | 1.6 µV/V  | 2.2 µV/V  |

Input bandwidth, -3 dB  $0.49 f_s$

Flatness, DC-20 kHz, referred to 1 kHz

Typical -40 mdB to 0 mdB

Maximum -150 mdB to 20 mdB

Phase non-linearity, DC-20 kHz  $0.2^\circ$

Input delay  $(40 + [5/512])/f_s + 3.9 \mu\text{s}$

Stopband

Frequency  $0.55 f_s$

Rejection 100 dB

Alias-free bandwidth  $0.45 f_s$

Oversample rate  $64 f_s$

<sup>7</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

|                                                       |                 |
|-------------------------------------------------------|-----------------|
| Rejection at oversample rate<br>( $f_s = 51.2$ kS/s)  | 100 dB          |
| Total Harmonic Distortion (THD), 1 kHz,<br>-1 dBFS    | -95 dBc         |
| Spurious-Free Dynamic Range (SFDR),<br>1 kHz, -1 dBFS | 95 dB           |
| Crosstalk                                             |                 |
| 60 Hz, 1 Vrms, common mode                            | -120 dBFS       |
| 1 kHz, normal mode, full-scale<br>aggressor           | -85 dBFS        |
| CMRR, 60 Hz, 1 Vrms-to-earth ground                   | -73 dBFS        |
| Strain excitation voltage                             |                 |
| 2 V level                                             | 2 V $\pm 3\%$   |
| 3.3 V level                                           | 3.3 V $\pm 3\%$ |
| Output current                                        |                 |
| 2 V level                                             | 17.8 mA         |
| 3.3 V level                                           | 10.1 mA         |

## Quarter-Bridge Characteristics

The quarter-bridge measurement type requires the NI 9984 or NI 9985 measurement-specific adapter. The characteristics are for the NI 9218 used in conjunction with the NI 9984 or the NI 9985.

|                   |           |
|-------------------|-----------|
| Input coupling    | DC        |
| Measurement range |           |
| Typical           | 22.1 mV/V |
| Minimum           | 21.7 mV/V |

**Table 10. Quarter-Bridge Accuracy**

| Measurement Conditions    |                          |                         | Gain  | Offset              |                                   |
|---------------------------|--------------------------|-------------------------|-------|---------------------|-----------------------------------|
|                           |                          |                         |       | Without Offset Null | ≤ 90 days, ±5 °C from Offset Null |
| Calibrated                | 3.3 V and 2 V excitation | Typical 23 °C ±5 °C     | 0.10% | 700 µV/V            | 45 µV/V                           |
|                           |                          | Maximum -40 °C to 70 °C | 0.20% | 1000 µV/V           | 90 µV/V                           |
| Uncalibrated <sup>8</sup> | 3.3 V and 2 V excitation | Typical 23 °C ±5 °C     | 1.2%  | 800 µV/V            | —                                 |
|                           |                          | Maximum -40 °C to 70 °C | 2.0%  | 1.1 mV/V            | —                                 |

Gain drift 10 ppm/°C

Offset drift 1.3 µV/V/°C

Quarter-bridge completion resistance

NI 9984 120 Ω

NI 9985 350 Ω

**Table 11. Input Noise, RMS**

| Excitation Voltage | Sample Rate |           |           |
|--------------------|-------------|-----------|-----------|
|                    | 4.27 kS/s   | 25.6 kS/s | 51.2 kS/s |
| 350 Ω, 3.3 V       | 0.4 µV/V    | 1.0 µV/V  | 1.3 µV/V  |
| 120 Ω, 2 V         | 0.7 µV/V    | 1.6 µV/V  | 2.2 µV/V  |

Input bandwidth, -3dB  $0.49 f_s$

Flatness, DC-20 kHz, referred to 1 kHz

Typical -40 mdB to 0 mdB

Maximum -150 mdB to 20 mdB

Phase non-linearity, DC-20 kHz 0.2°

<sup>8</sup> Uncalibrated accuracy refers to the accuracy achieved when acquiring in raw or unscaled modes where the calibration constants stored in the module are not applied to the data.

|                                                               |                                        |
|---------------------------------------------------------------|----------------------------------------|
| Input delay                                                   | $(40 + [5/512])/f_s + 3.9 \mu\text{s}$ |
| Stopband                                                      |                                        |
| Frequency                                                     | $0.55 f_s$                             |
| Rejection                                                     | 100 dB                                 |
| Alias-free bandwidth                                          | $0.45 f_s$                             |
| Oversample rate                                               | $64 f_s$                               |
| Rejection at oversample rate<br>( $f_s = 51.2 \text{ kS/s}$ ) | 100 dB                                 |
| Total Harmonic Distortion (THD), 1 kHz,<br>-1 dBFS            | -95 dBc                                |
| Spurious-Free Dynamic Range (SFDR),<br>1 kHz, -1 dBFS         | 95 dB                                  |
| Crosstalk                                                     |                                        |
| 60 Hz, 1 Vrms, common mode                                    | -120 dBFS                              |
| 1 kHz, normal mode, full-scale<br>aggressor                   | -85 dBFS                               |
| CMRR, 60 Hz, 1 Vrms-to-earth ground                           | -73 dBFS                               |
| Strain excitation voltage                                     |                                        |
| 2 V level                                                     | 2 V $\pm 3\%$                          |
| 3.3 V level                                                   | 3.3 V $\pm 3\%$                        |
| Output current                                                |                                        |
| 2 V level                                                     | 17.8 mA                                |
| 3.3 V level                                                   | 10.1 mA                                |

## Power Requirements

|                                                   |                           |
|---------------------------------------------------|---------------------------|
| Maximum power consumption from chassis            |                           |
| Active mode                                       | 900 mW maximum            |
| Sleep mode                                        | 500 $\mu\text{W}$ maximum |
| Maximum thermal dissipation, from -40 °C to 70 °C |                           |
| Active mode                                       | 1.5 W maximum             |
| Sleep mode                                        | 550 mW maximum            |

## Vsup Power Requirements

|                          |             |
|--------------------------|-------------|
| Vsup input voltage range | 9 V to 30 V |
|--------------------------|-------------|

## Maximum power consumption from Vsup

|             |                |
|-------------|----------------|
| Active mode | 2 W maximum    |
| Sleep mode  | 400 mW maximum |

## Physical Characteristics

If you need to clean the module, wipe it with a dry towel.



**Tip** For two-dimensional drawings and three-dimensional models of the C Series module and connectors, visit [ni.com/dimensions](https://ni.com/dimensions) and search by module number.

### Weight

|                   |                 |
|-------------------|-----------------|
| NI 9218 with DSUB | 151 g (5.33 oz) |
| NI 9218 with LEMO | 165 g (5.82 oz) |

## NI 998x Physical Characteristics

### Screw-terminal wiring

|                            |                                                                                         |
|----------------------------|-----------------------------------------------------------------------------------------|
| Gauge                      | 0.05 mm <sup>2</sup> (30 AWG) to 1.31 mm <sup>2</sup> (16 AWG)<br>copper conductor wire |
| Wire strip length          | 6 mm (0.236 in.) of insulation stripped from<br>the end                                 |
| Temperature rating         | 80 °C minimum                                                                           |
| Wires per screw terminal   | One or two wires per screw terminal                                                     |
| Ferrules, single wire      | 0.25 mm <sup>2</sup> (20 AWG) to 0.52 mm <sup>2</sup> (24 AWG)                          |
| Torque for screw terminals | 0.2 N · m to 0.25 N · m (1.77 lb · in. to<br>2.21 lb · in.)                             |

### Wire securement

|                                    |                                                                       |
|------------------------------------|-----------------------------------------------------------------------|
| NI 998xD, NI 998xL securement type | Three collets provided<br>(ranging from 2.2 mm to 5.2 mm in diameter) |
| Torque for collet nut              | 1.5 N · m (13.3 lb · in.)                                             |
| NI 998xF securement type           | Zip tie provided                                                      |

### NI 998xD and NI 998xF connector securement

|                  |                         |
|------------------|-------------------------|
| Securement type  | Jackscrews provided     |
| Jackscrew torque | 0.4 N · m (3.6 in · lb) |

### Weight

|                    |                           |
|--------------------|---------------------------|
| NI 998xD, NI 998xL | 142 g (5.0 oz) with cable |
| NI 998xF           | 34 g (1.2 oz)             |

# NI 9218 with LEMO Safety Voltages

Connect only voltages that are within the following limits:

Maximum voltage,  $\pm 30\text{ V}$   
from any pin to any pin  
on a single connector<sup>9</sup>

Isolation

| Channel-to-channel, channel-to-Vsup, channel-to-earth, Vsup-to-earth (up to 5,000 m) <sup>10</sup> |                                                         |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Continuous                                                                                         | 60 VDC, Measurement Category I                          |
| Withstand                                                                                          | 1,000 Vrms, verified by a 5 s dielectric withstand test |



**Caution** Any excitation output voltage to earth ground must remain below 60 VDC for each channel. To determine excitation output voltage to earth ground for a channel, add the maximum excitation voltage to the maximum potential on pin 3. The maximum excitation voltages are 2 V +3% and 3.3 V +3% for the bridge excitations, 12 V +5% for the +12 V excitation, and 22 V for the IEPE excitation.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



**Caution** Do not connect the NI 9218 to signals or use for measurements within Measurement Categories II, III, or IV.



**Note** Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

# NI 9218 with DSUB Safety Voltages

Connect only voltages that are within the following limits:

Maximum voltage,  $\pm 30\text{ V}$   
from any pin to any pin  
on a single connector<sup>11</sup>

<sup>9</sup> The maximum voltage between pin 2 and pin 3 on a single connector is -20 V to +30 V.  
<sup>10</sup> Must use crimp contact LEMO plug (784162-01) to maintain these ratings. Ratings are invalidated if solder version is used.  
<sup>11</sup> The maximum voltage between pin 2 and pin 3 on a single connector is -20 V to +30 V.

# Isolation

|                                                            |                                                         |
|------------------------------------------------------------|---------------------------------------------------------|
| Channel-to-channel, channel-to-Vsup inputs (up to 5,000 m) |                                                         |
| Continuous                                                 | 60 VDC, Measurement Category I                          |
| Withstand                                                  | 1,000 Vrms, verified by a 5 s dielectric withstand test |
| Channel-to-earth ground (up to 3,000 m)                    |                                                         |
| Continuous                                                 | 60 VDC, Measurement Category I                          |
| Withstand                                                  | 1,000 Vrms, verified by a 5 s dielectric withstand test |
| Channel-to-earth ground (up to 5,000 m)                    |                                                         |
| Continuous                                                 | 60 VDC, Measurement Category I                          |
| Withstand                                                  | 860 Vrms                                                |
| Vsup inputs-to-earth ground (up to 5,000 m)                |                                                         |
| Continuous                                                 | 60 VDC, Measurement Category I                          |
| Withstand                                                  | 1,000 Vrms, verified by a 5 s dielectric withstand test |



**Caution** Any excitation output voltage to earth ground must remain below 60 VDC for each channel. To determine excitation output voltage to earth ground for a channel, add the maximum excitation voltage to the maximum potential on pin 3. The maximum excitation voltages are 2 V +3% and 3.3 V +3% for the bridge excitations, 12 V +5% for the +12 V excitation, and 22 V for the IEPE excitation.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



**Caution** Do not connect the NI 9218 to signals or use for measurements within Measurement Categories II, III, or IV.



**Note** Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

# Hazardous Locations

|                                         |                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------|
| U.S. (UL)                               | Class I, Division 2, Groups A, B, C, D, T4;<br>Class I, Zone 2, AEx nA IIC T4 |
| Canada (C-UL)                           | Class I, Division 2, Groups A, B, C, D, T4;<br>Class I, Zone 2, Ex nA IIC T4  |
| Europe (ATEX) and International (IECEX) | Ex nA IIC T4 Gc                                                               |

## Safety and Hazardous Locations Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1
- EN 60079-0:2012, EN 60079-15:2010
- IEC 60079-0: Ed 6, IEC 60079-15: Ed 4
- UL 60079-0; Ed 5, UL 60079-15; Ed 3
- CSA 60079-0:2011, CSA 60079-15:2012



**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

## Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use; for radio equipment; and for telecommunication terminal equipment:

- EN 61326-1 (IEC 61326-1): Class A emissions; Industrial immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations and certifications, and additional information, refer to the [Online Product Certification](#) section.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 94/9/EC; Potentially Explosive Atmospheres (ATEX)

## Shock and Vibration

To meet these specifications, you must panel mount the system.

### Operating vibration

|                                  |                                                                             |
|----------------------------------|-----------------------------------------------------------------------------|
| Random (IEC 60068-2-64)          | 5 g <sub>rms</sub> , 10 Hz to 500 Hz                                        |
| Sinusoidal (IEC 60068-2-6)       | 5 g, 10 Hz to 500 Hz                                                        |
| Operating shock (IEC 60068-2-27) | 30 g, 11 ms half sine; 50 g, 3 ms half sine;<br>18 shocks at 6 orientations |

## Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit [ni.com/certification](https://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

## Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

|                                                         |                                 |
|---------------------------------------------------------|---------------------------------|
| Operating temperature<br>(IEC 60068-2-1, IEC 60068-2-2) | -40 °C to 70 °C                 |
| Storage temperature<br>(IEC 60068-2-1, IEC 60068-2-2)   | -40 °C to 85 °C                 |
| Ingress protection                                      | IP40                            |
| Operating humidity (IEC 60068-2-78)                     | 10% RH to 90% RH, noncondensing |
| Storage humidity (IEC 60068-2-78)                       | 5% RH to 95% RH, noncondensing  |

|                  |         |
|------------------|---------|
| Pollution Degree | 2       |
| Maximum altitude | 5,000 m |

Indoor use only.

## NI 998x Environmental

|                                       |                 |
|---------------------------------------|-----------------|
| Operating temperature (IEC 60068-2-1) | -40 °C to 70 °C |
|---------------------------------------|-----------------|

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china).)

## Calibration

You can obtain the calibration certificate and information about calibration services for the NI 9218 at [ni.com/calibration](https://ni.com/calibration).

|                      |         |
|----------------------|---------|
| Calibration interval | 2 years |
|----------------------|---------|

Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2016 National Instruments. All rights reserved.

376918A-02 Mar16